


DCS 200 TYPICAL WIRING DIAGRAM

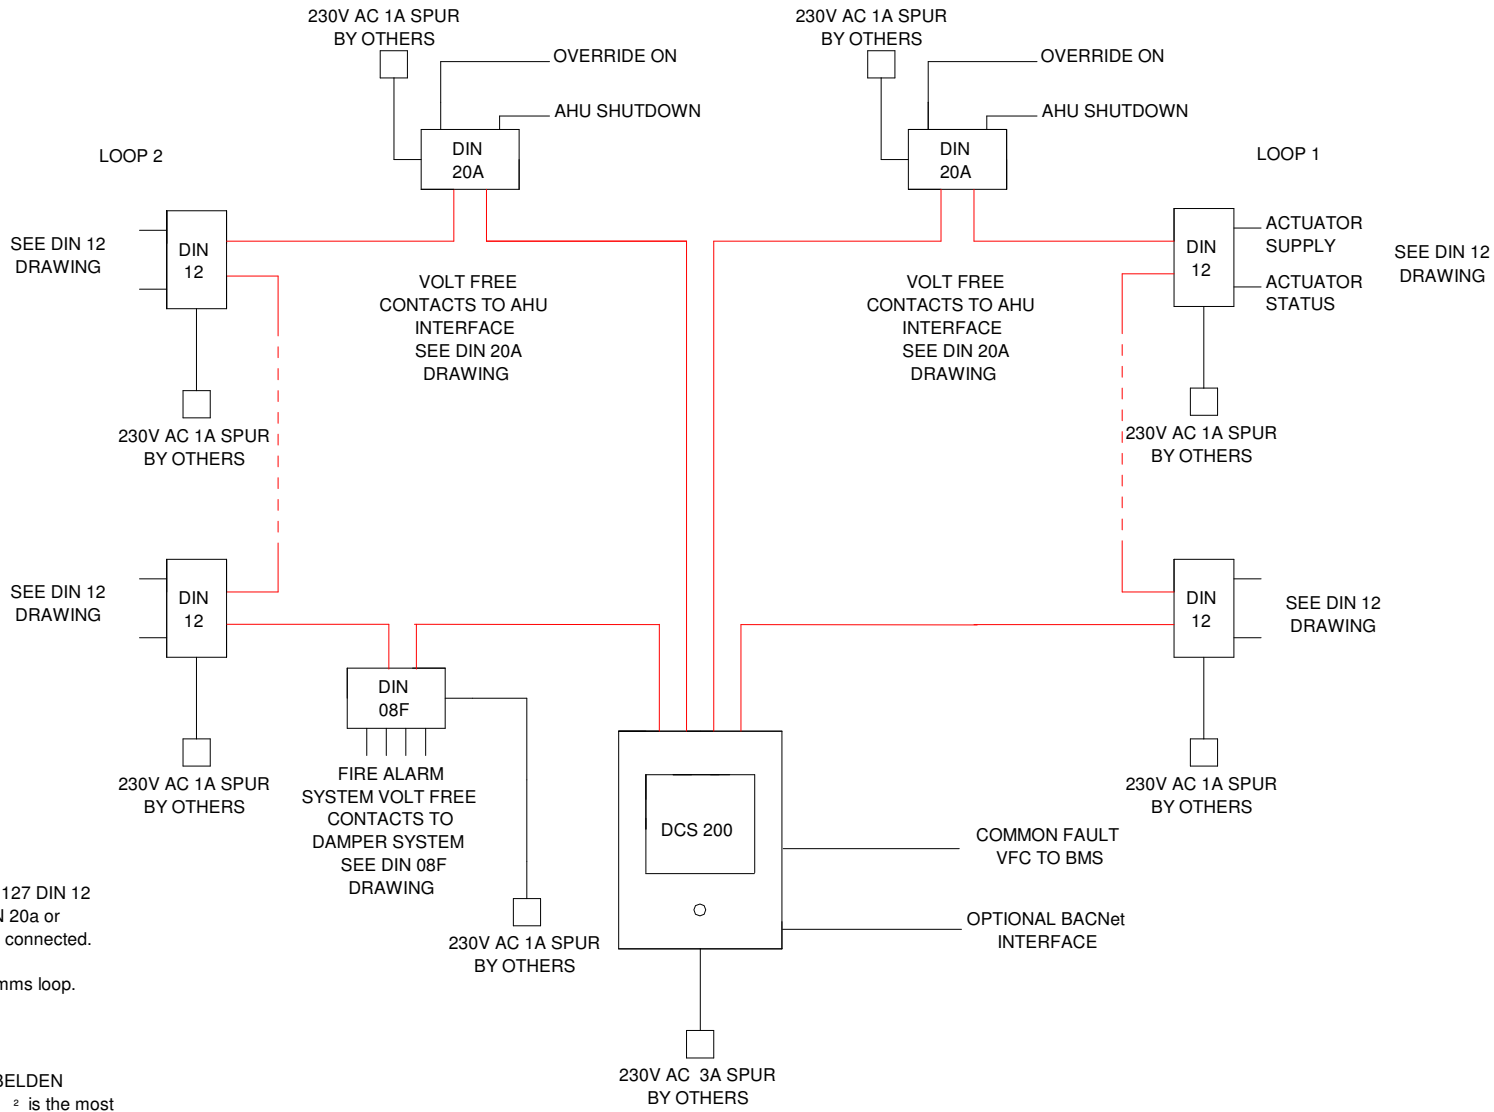

Each comms loop is capable of having 127 DIN 12 damper control nodes and up to 20 DIN 20a or DIN 08F's (or a combination of the two) connected.

DIN 08F's may be located on either comms loop.

Approved comms loop cables include BELDEN 9841 and FP200. FP200 Gold 1.5mm² is the most commonly used.

MAX LOOP LENGTH 3km