


DCS 50 TYPICAL WIRING DIAGRAM FOR 24V DAMPERS

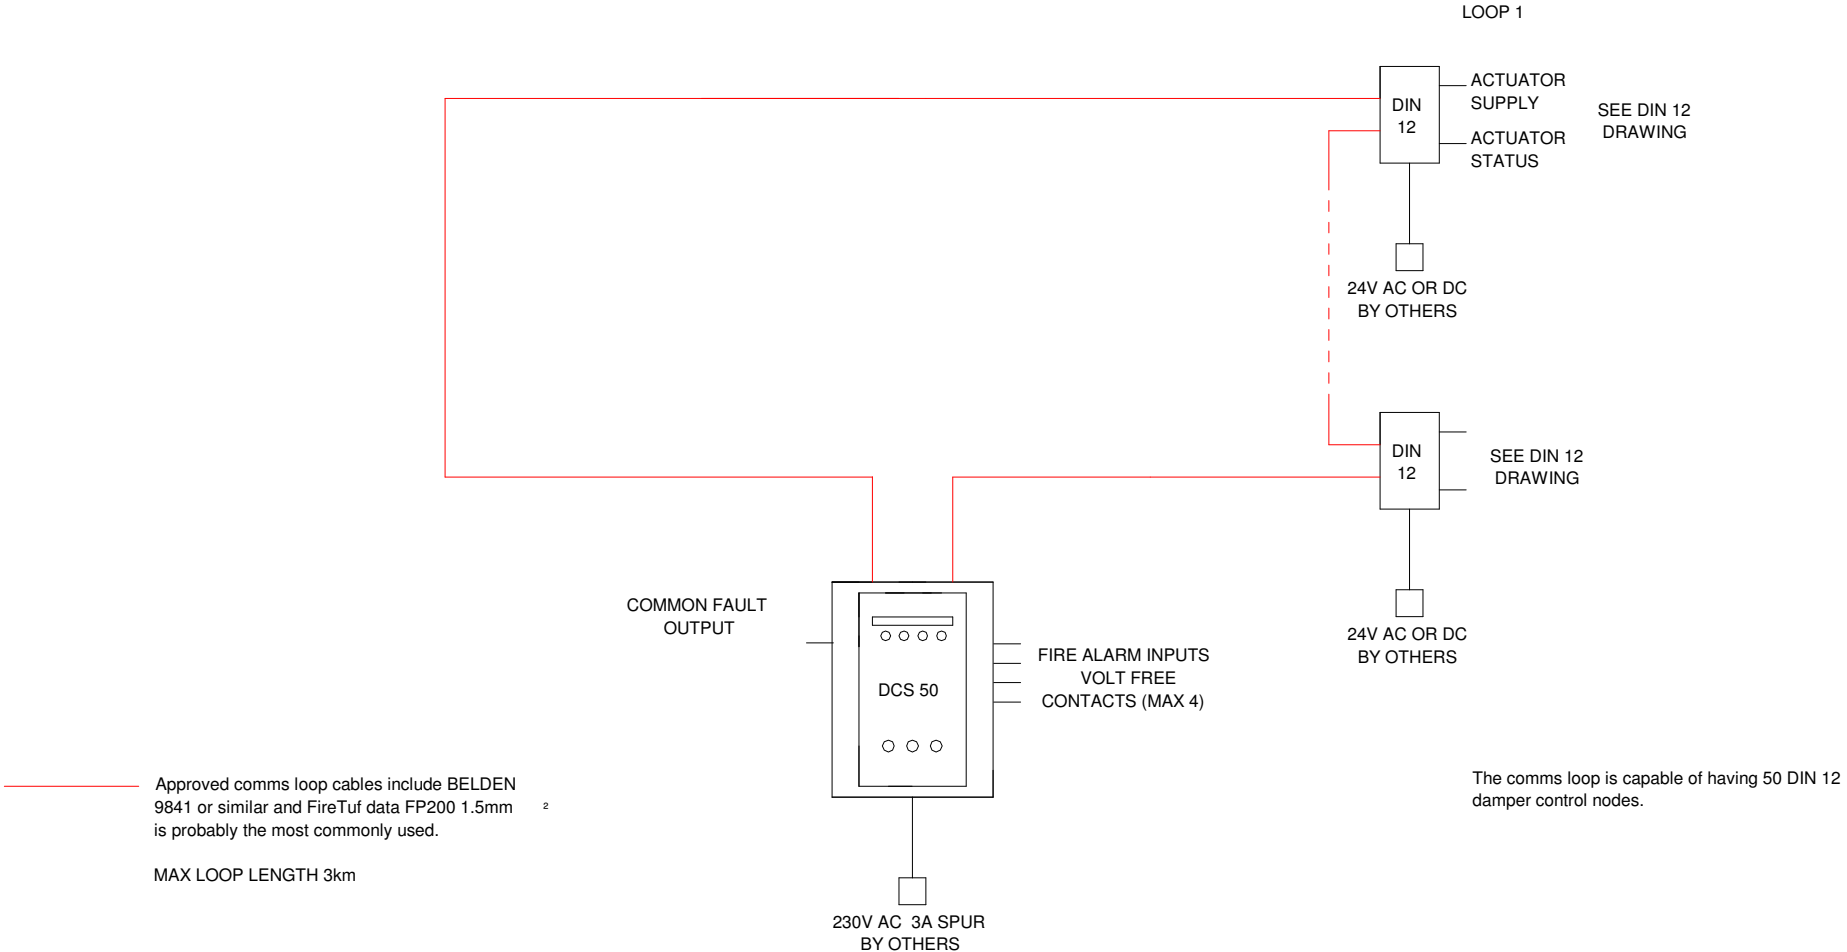

Approved comms loop cables include BELDEN 9841 or similar and FireTuf data FP200 1.5mm² is probably the most commonly used.

MAX LOOP LENGTH 3km

The comms loop is capable of having 50 DIN 12 damper control nodes.